



SCHOTT PYRAN[®] Platinum Fire-Rated Glass-Ceramic



PYRAN[®] Platinum glass-ceramic products are classified and labeled by Underwriters Laboratories, Inc. for the United States and Canada with File-No. R22036. All fire tests performed in accordance with UL9, UL10B, UL10C, UBC7-2 (1997), UBC7-4 (1997), NFPA252, NFPA257, NFPA80, ASTM E2010-01, ASTM E2074-00, ULCCAN4-S104, and ULCCAN4-S106.

	Rating (Minutes)	Location	Max. Exposed area of glazing (in ²)	Max. width of exposed glazing (inches)	Max. height of exposed glazing (inches)	Min. depth of glazing channel	Impact Safety Rated
PYRAN[®] Platinum Monolithic	Up to 90	Other than doors	3,422 (23.7 ft ²)	76	76	5/8"	No
PYRAN[®] Platinum F (Filmed)	Up to 90	Doors Non-Temp Rise	2,736 (19 ft ²)	36	76	5/8"	Yes
	Up to 180	Doors Temp-Rise and Non-Temp rise	100 (0.69 ft ²)	12	33	1/2"	Yes
	Up to 90	Other than doors	3,422 (23.7 ft ²)	76	76	5/8"	Yes
PYRAN[®] Platinum L (Laminated)	Up to 90	Doors Non-Temp Rise	2,736 (19 ft ²)	36	75	5/8"	Yes
	Up to 180	Doors Temp-Rise and Non-Temp rise	100 (0.69 ft ²)	12	75	1/2"	Yes
	Up to 90	Other than doors	3,143 (21.8 ft ²)	75	75	5/8"	Yes

For complete PYRAN[®] Platinum product information including Labeling, Storage & Handling, Installation and Maintenance and Care Guidelines, please contact Great Lakes Glass Distributors, your local fabricator. Failure to comply with these guidelines may result in a loss of warranty.

Distributed nationally by:



Sales@generalglass.com

Available locally from:



Phone: 734-656-3900
Fax: 734-656-3920
www.greatlakesglassdistributors.com


Produced by:



SCHOTT PYRAN® Platinum Fire-Rated Glass-Ceramic

Description

PYRAN® Platinum fire-rated glass-ceramic products are the next generation of glass-ceramics. Produced by micro-float technology, PYRAN® Platinum fire-rated glass-ceramics, offer stunning optical quality with superior clarity and virtually no distortion. Designed especially for the North American market, PYRAN® Platinum is UL certified and passes the required hose stream test. PYRAN® Platinum glass-ceramic is environmentally friendly. It is the only fire-rated glass-ceramic that is made without the use of hazardous heavy metals arsenic, antimony and barium. Available in three versions: Monolithic, Filmed, and Laminated.

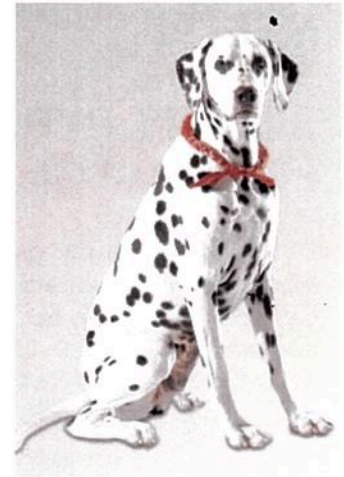

ECO-FRIENDLY

MONOLITHIC

PYRAN® Platinum monolithic fire-protection rated glazing material is 3/16" (5 mm) thick. It is intended for use in non-impact, safety-rated locations such as transoms and windows with fire-rating requirements up to 90 minutes.

Characteristics

- Thickness: 3/16" (5 mm) • Weight: 2.5 lbs/ft² • True color transmission • Sheet sizes: 43" x 77"
- Impact rating: None • Conforms to positive pressure standards • Passes required hose stream test.

FILMED

PYRAN® Platinum F (Filmed) fire-protection rated and impact safety-rated glazing material is 3/16" (5 mm) thick. It has a surface applied safety film and is intended for use in safety-rated locations such as door lites, transoms or sidelites, and windows with fire-rating requirements up to 90 minutes (up to 180 minutes in doors).

Characteristics

- Thickness: 3/16" (5 mm) • Weight: 2.5 lbs/ft² • True color transmission • Sheet sizes: 43" x 77"
- Impact rating: ANSIZ97.1 and CPSC16CFR1201 (Cat. I and II) • Conforms to positive pressure standards • Passes required hose stream test.

LAMINATED

PYRAN® Platinum L (Laminated) fire-protection rated and impact safety-rated glazing material is 3/8" (9 mm). It is intended for use in safety-rated locations such as door lites, transoms or sidelites, and windows with fire-rating requirements up to 90 minutes (doors: up to 3 hours).

Characteristics

- Thickness: 3/8" (9 mm) • Weight: 4.0 lbs/ft² • True color transmission • Sheet sizes: 43" x 77"
- Impact rating: ANSIZ97.1 and CPSC16CFR1201 (Cat. I and II) • STC rating: ~ 36 dB
- Conforms to positive pressure standards • Passes required hose stream test.

MONOLITHIC

FILMED

LAMINATED